

Filigree Sun screens



FEATURES

Single Vane Filigree

The Filigree screens filter light into offices without seriously impairing the view out through the windows, thus contributing to pleasant working conditions whilst achieving substantial reductions of air conditioning requirements.

Available in a variety of standard cellular modules and blade pitch to meet the specific requirements of any elevation.

A most acceptable and cost-effective means of obtaining optimum sun control.

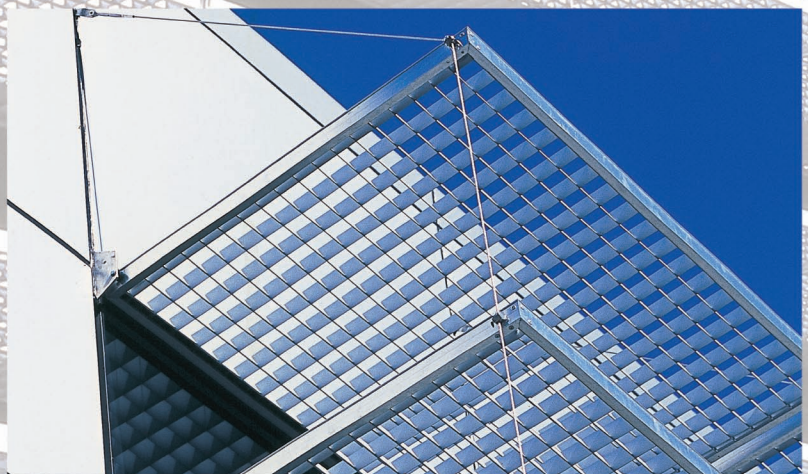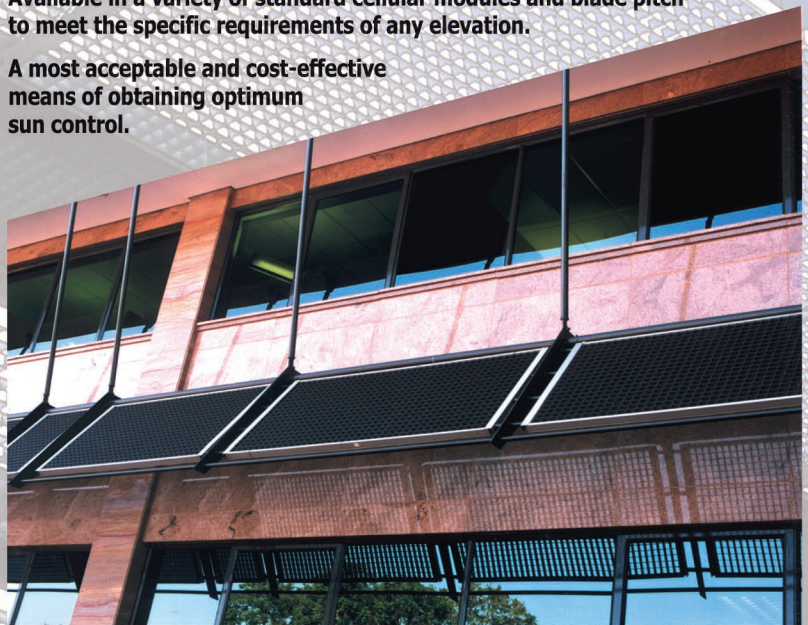



TYPE 1 VANE



Screen 1 is made up of two single vane slats type 1. These slats are punched and assembled in a vertical and horizontal position and finished off with type 4 surrounds.

The module of this screen is variable from 50mm to 70mm on both the vertical and the horizontal slat.

TYPE 2 VANE

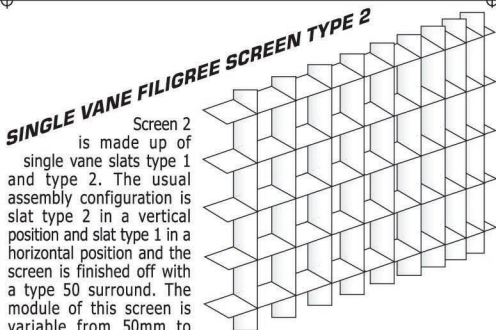

Screen 2 is made up of single vane slats type 1 and type 2. The usual assembly configuration is slat type 2 in a vertical position and slat type 1 in a horizontal position and the screen is finished off with a type 50 surround. The module of this screen is variable from 50mm to 70mm on the vertical slat and 52mm to 70mm on the horizontal slat.

TYPE 3 VANE



Screen 3 is made up of one vertical slat type 1 and one slat type 1 bent down the length of the blade to form a type 3 vane, and assembled in a horizontal position.

The screen is finished off with a type 54 surround. The module of the vertical screen is to 70mm and that of the horizontal slat variable from 50mm to 70mm depending on sun control needs.

SURROUND PROFILE DETAIL

